



# STINGER EXO25

## SYNTHETIC UNDERLAYMENT


Product Specification		Test Method
Roll Width	48 in.	
Roll Length	250 ft.	
Weight Per Square	2.0 lbs	
Nominal Thickness	7 Mils	ASTM D-1777
Water Transmission	Pass	ASTM D-4869
Tensile Strength		ASTM D-828
	MD 57 lbs	
	CD 57 lbs	
Tear Strength		ASTM D-4533
	MD 36 lbs	
	CD 36 lbs	
Pliability	Pass	ASTM D-226
Water Ponding	Pass	ASTM D-779

**ICC-ES ESR-3905**

**MEETS OR EXCEEDS  
REQUIREMENTS  
FOR ASTM D226 & D4869**

STINGER-branded; 48" x 48".

Co-branding available with 34" x 17" logo.

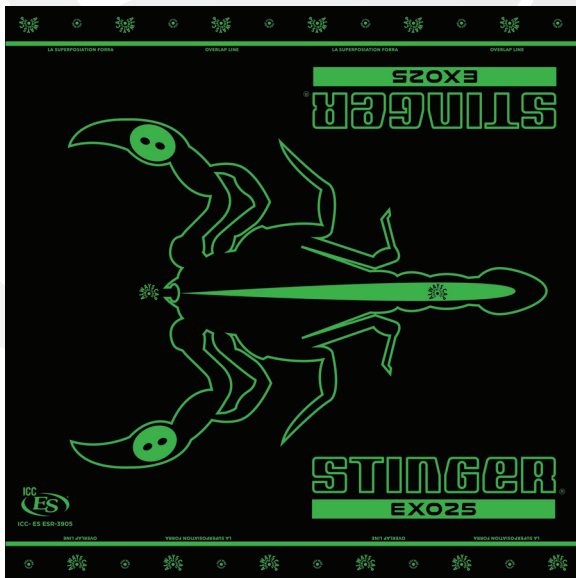

**ITEM #0342970**




800.746.5659  
stingerworld.com



# STINGER<sup>®</sup> EXO25

## SYNTHETIC UNDERLAYMENT

- 25 year warranty.
- ICC-ES ESR-3905
- Made in the United States.
- Proprietary non-skid additive on walking surface for slip resistance.
- 100% polypropylene synthetic woven fabric offers high tear strength.
- Manufactured from post industrial recycled materials.
- 100% recyclable - eliminates job site scrap.
- Light - only 20lbs per roll.
- 10 squares per roll - fewer rolls to carry on the roof.
- UV resistant - can be left exposed for up to 6 months.
- Preprinted nailing pattern and overlap lines to speed installation.
- Recommended installation with STINGER<sup>®</sup> cap tools and cap fasteners, available in collated StaplePac<sup>®</sup> and NailPac<sup>®</sup> or HandDrive cap nails.



### STINGER CAP SYSTEMS

RECOMMENDED **BEST PRACTICE** FOR SECURING SYNTHETIC UNDERLAYMENTS AND HOUSEWRAP.

**25 YEAR WARRANTY**



800.746.5659  
stingerworld.com