

# STINGER<sup>®</sup> EXO35


## SPUN BOND MULTI-PLY SYNTHETIC UNDERLAYMENT

Product Specification		Test Method
Roll Width	48 in.	
Roll Length	250 ft.	
Weight Per Square	2.0 lbs	
Nominal Thickness	7 Mills	ASTM D-1777
Water Transmission	Pass	ASTM D-4869
Breaking Strength		ASTM D-146
	MD 72 lbs	
	CD 40 lbs	
Dimensional Stability		ASTM F-1087
	MD .04	
	CD .05	
Pliability	Pass	ASTM D-226
Unrolling		
	30° F Pass	
	140° F Pass	
Nail Sealability	Pass	ASTM D-7349

**ICC-ES ESR-3905**

**MEETS OR EXCEEDS  
REQUIREMENTS  
FOR ASTM D226 & D4869**


STINGER-branded; 48" x 48".

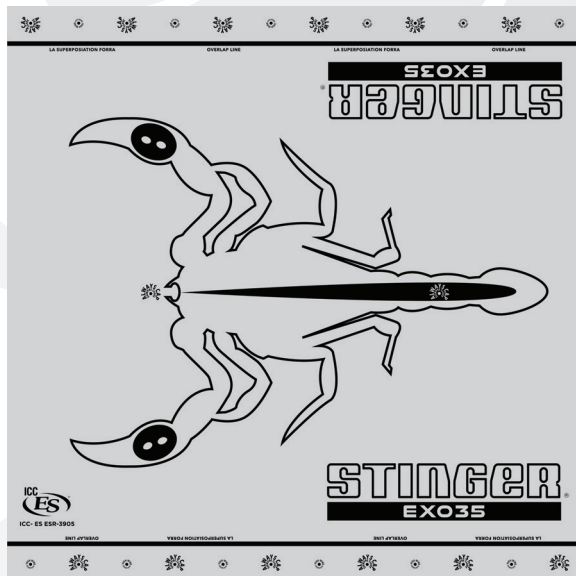

**ITEM #0342973**

Co-branding available with 34" x 17" logo.






# STINGER<sup>®</sup> EXO35

## SPUN BOND MULTI-PLY SYNTHETIC UNDERLAYMENT

- 35 year warranty.
- ICC-ES ESR-3905
- Made in the United States.
- Slip resistant spun bond walking surface for added safety; proprietary non-skid additive on underside for better roof deck contact.
- Absorbant top layer reduces water on walking surface.
- 100% polypropylene synthetic woven fabric offers high tear strength.
- Light gray color reduces heat and provides cooler working surface.
- Light - only 20lbs per roll.
- 10 squares per roll - fewer rolls to carry on the roof.
- UV resistant - can be left exposed for up to 6 months.
- Preprinted nailing pattern and overlap lines to speed installation.
- Recommended installation with STINGER<sup>®</sup> cap tools and cap fasteners, available in collated StaplePac<sup>®</sup> and NailPac<sup>®</sup> or HandDrive cap nails.



### STINGER CAP SYSTEMS

RECOMMENDED **BEST PRACTICE** FOR SECURING SYNTHETIC UNDERLAYMENTS AND HOUSEWRAP.

## 35 YEAR WARRANTY



800.746.5659  
stingerworld.com