

STINGER[®] EXO50


PREMIUM SYNTHETIC UNDERLAYMENT

Product Specification		Test Method
Roll Width	48 in.	
Roll Length	250 ft.	
Weight Per Square	2.8 lbs	
Nail Seal Ability	Pass	ASTM D-1970
Water Transmission	Pass	ASTM D-4869
Tensile Strength		ASTM D-828
	MD 96 lbs	
	CD 116 lbs	
Tear Strength		ASTM D-4533
	MD 58 lbs	
	CD 77 lbs	
Pliability	Pass	ASTM D-226
Water Ponding	Pass	ASTM D-779

ICC-ES ESR-3905

**MEETS OR EXCEEDS
REQUIREMENTS
FOR ASTM D226 TYPE I & II**

STINGER-branded; 48" x 48".

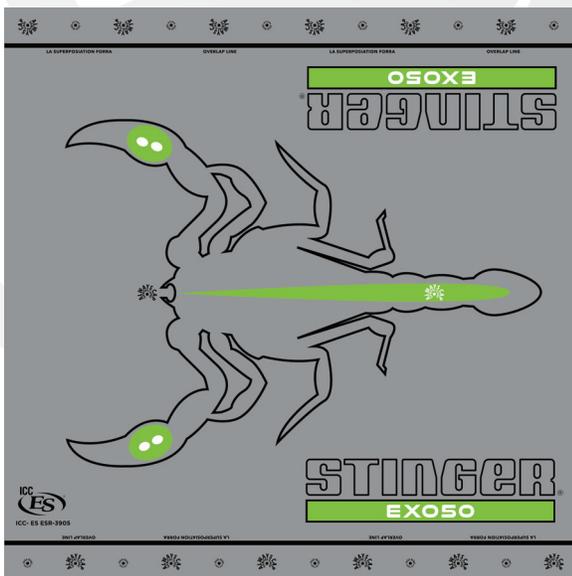


ITEM #0342975

Co-branding available with 34" x 17" logo.




800.746.5659
stingerworld.com



STINGER[®] EXO50

PREMIUM SYNTHETIC UNDERLAYMENT

- 50 year warranty.
- ICC-ES ESR-3905
- Made in the United States.
- Proprietary non-skid additive on both sides for highest slip resistance.
- Light gray color reduces heat and provides cooler working surface.
- 100% polypropylene woven synthetic is stronger than 30# felt - won't tear off or buckle when wet.
- Class A Fire Rating as an approved Class A prepared roofing assembly.
- Light - only 28lbs per roll.
- 10 squares per roll means fewer rolls to carry on the roof.
- UV resistant - can be left exposed for up to 6 months.
- Preprinted nailing pattern and overlap lines to speed installation.
- Approved and warrantied for use under metal roof coverings.
- Recommended installation with STINGER[®] cap tools and cap fasteners, available in collated StaplePac[®] and NailPac[®] or HandDrive cap nails.
- Can save up to 50% in labor cost, compared to 30# felt.



STINGER CAP SYSTEMS

RECOMMENDED **BEST PRACTICE** FOR SECURING SYNTHETIC UNDERLAYMENTS AND HOUSEWRAP.

50 YEAR WARRANTY



800.746.5659
stingerworld.com